





EXTREME SERIES FRAME FE84BD-3 W/10-32 RAILS

REVISIONS			
REV	ECO	DATE	DESCRIPTION
--	--	--	RELEASED TO PRODUCTION

DIMENSIONS **FRAME EXTREME SERVER/NETWORKING**
 FULLY WELDED TUBULAR STEEL CHASSIS
 1x3 TUBING (16GA)
 GUSSETS FOR FLOOR AND REAR BRACING
 (19" RACKABLE PER E.I.A. STD.)
 FOUR POINT ADJUSTABLE LEVELLING
 HEIGHT 84.50"
 WIDTH 24.00"
 DEPTH 36.00"

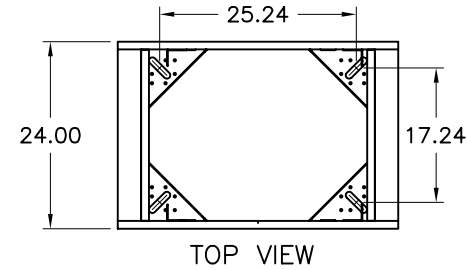

RAIL TYPE **L-TYPE RAILS**
 10-32 TAPPED HOLES
 19" RACKABLE
 ADJUSTABLE
 47U

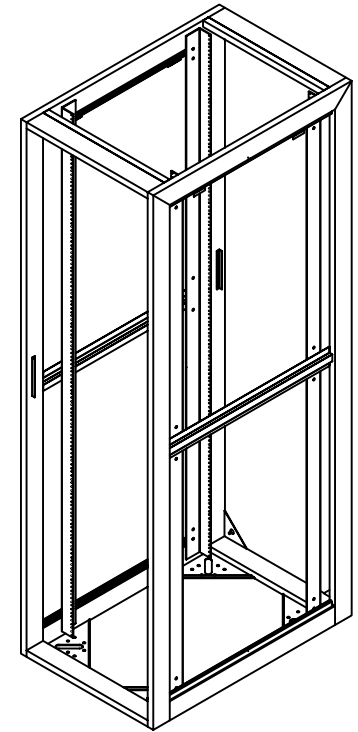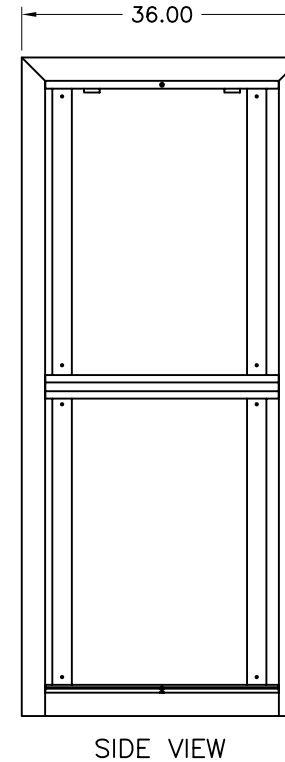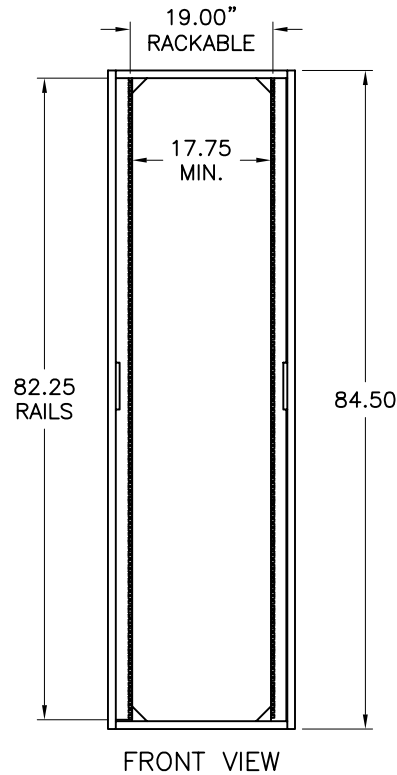

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.
 TOLERANCE .000±.010 .005±.030 .03±.080 (DEG)±.5
 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: **FRAME, EXTREME**
84.50 x 24.00 x 36.00
W/10-32 RAILS

PART NO. **FE84BD-3**
 DRAWN BY: **AP** DATE: **07.17.2006**

CHECKED BY: **CR** SCALE: **N/A**
 SHEET: **1 OF 1** REV: **--**

MATERIAL: **N/A**
 FINISH: **BLACK POWDER-COATED**
 MAX BEND R=.030, RELIEF=.060 A/R.
 UNLESS OTHERWISE SPECIFIED