


# EXTREME SERIES FRAME




## FE84BQ-3 W/10-32 TAPPED RAILS

REVISIONS			
REV	ECO	DATE	DESCRIPTION
--	--	--	RELEASED TO PRODUCTION

**DIMENSIONS** **FRAME EXTREME SERVER/NETWORKING**  
 FULLY WELDED TUBULAR STEEL CHASSIS  
 1x3 TUBING (16GA)  
 GUSSETS FOR FLOOR AND REAR BRACING  
 (19" RACKABLE PER E.I.A. STD.)  
 FOUR POINT ADJUSTABLE LEVELLING  
 HEIGHT 84.50"  
 WIDTH 24.00"  
 DEPTH 42.00"

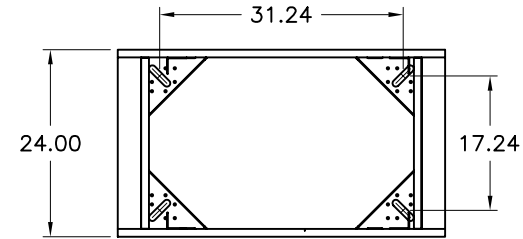

**RAIL TYPE** **L-TYPE RAILS**  
 10-32 TAPPED HOLES  
 19" RACKABLE  
 ADJUSTABLE  
 47U

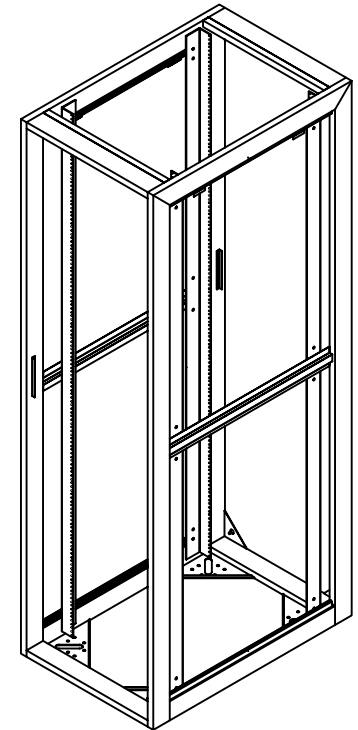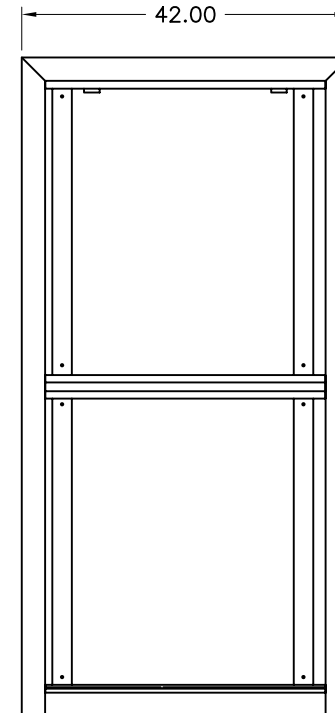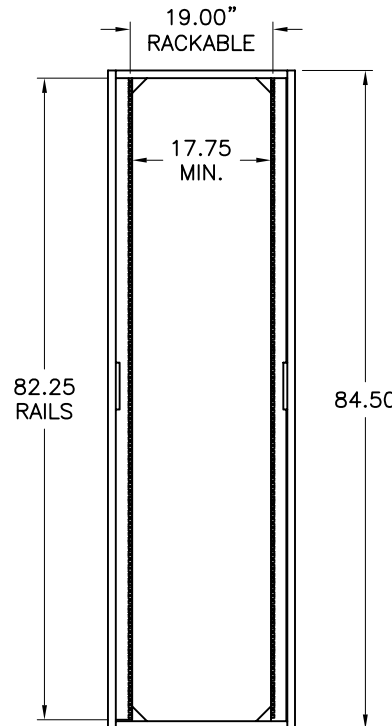

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.  
 TOLERANCE .000±.010 .001±.030 .031±.080 \*(DED)±.5  
 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: **FRAME, EXTREME**  
**84.50 x 24.00 x 42.00**  
**W/10-32 TAPPED**

PART NO. **FE84BQ-3**  
 DRAWN BY: **AP** DATE: **07.19.2006**

CHECKED BY: **CR** SCALE: **N/A**  
 SHEET: **1 OF 1** REV: **--**

MATERIAL: **N/A**  
 FINISH: **BLACK POWDER-COATED**  
 MAX BEND R=.030, RELIEF=.060 A/R.  
 UNLESS OTHERWISE SPECIFIED