

# SEISMIC SERIES FRAME FS72BB-3 W/10-32 TAPPED RAILS

## DIMENSIONS


### FRAME SEISMIC

2x2 TUBING (16GA)  
GUSSETS FOR FLOOR AND REAR BRACING  
(19" RACKABLE PER E.I.A STD)  
FOUR POINT ADJUSTABLE LEVELING  
HEIGHT 72.00"  
WIDTH 24.00"  
DEPTH 30.00"


## RAIL TYPE

### L-TYPE RAILS


10-32 TAPPED HOLES  
FULLY ADJUSTABLE FRONT TO REAR  
38U

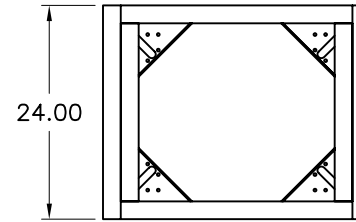


TOP VIEW

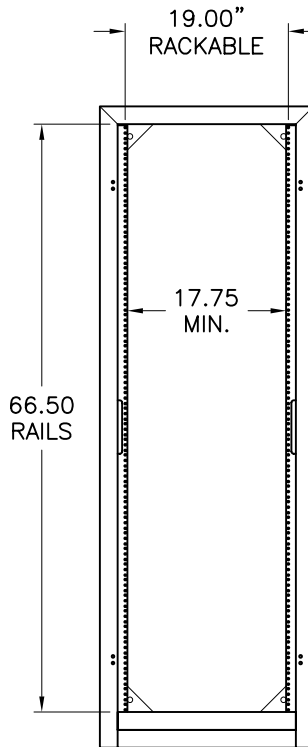

FRONT VIEW

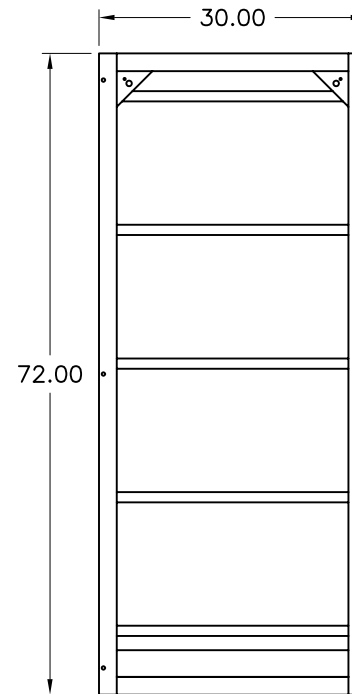

SIDE VIEW

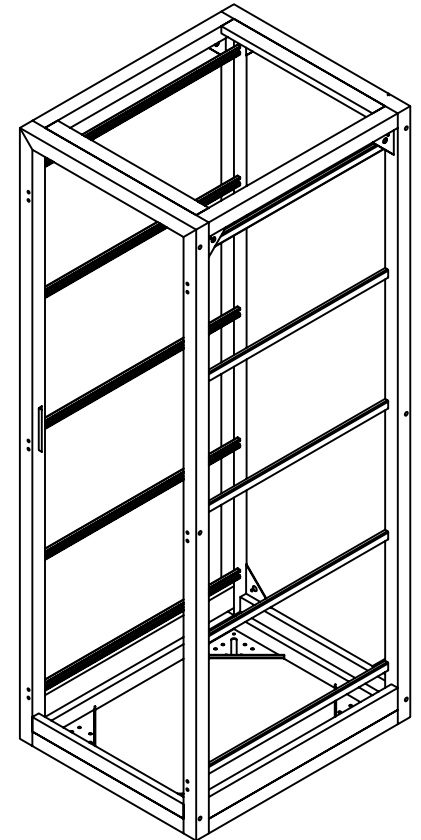

**DAMAC**  
PRODUCTS INC.  
LA MIRADA, CA 90638

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.  
TOLERANCE .000±.010 .001±.030 .002±.080 (DED)±.5  
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: FRAME, SEISMIC  
72" x 24" x 30"  
NEBS RATED

PART NO.  
FS72BB-3  
DRAWN BY: AP  
DATE: 07.24.2006

CHECKED BY: CR  
SCALE: N/A  
SHEET: 1 OF 1

MATERIAL: N/A.  
FINISH: RAW(NON-FINISHED).  
MAX BEND R=.030, RELIEF=.060 A/R.  
UNLESS OTHERWISE SPECIFIED