

SEISMIC SERIES FRAME FS72BQ-3 W/10-32 TAPPED RAILS

DIMENSIONS


FRAME SEISMIC

2x2 TUBING (16GA)
GUSSETS FOR FLOOR AND REAR BRACING
(19" RACKABLE PER E.I.A STD)
FOUR POINT ADJUSTABLE LEVELING
HEIGHT 72.00"
WIDTH 24.00"
DEPTH 42.00"


RAIL TYPE

L-TYPE RAILS


10-32 TAPPED HOLES
FULLY ADJUSTABLE FRONT TO REAR
38U

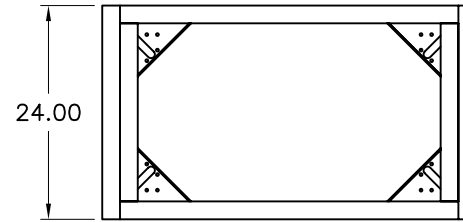


TOP VIEW

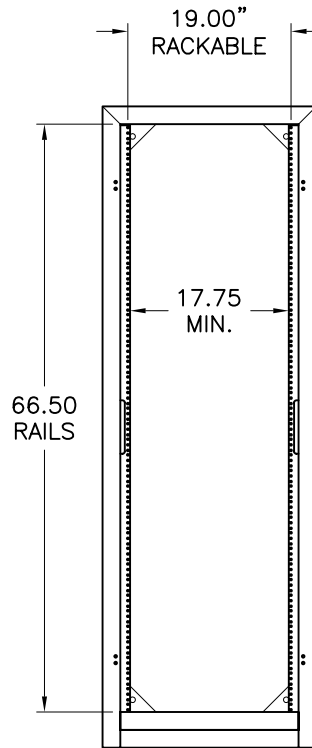


FRONT VIEW

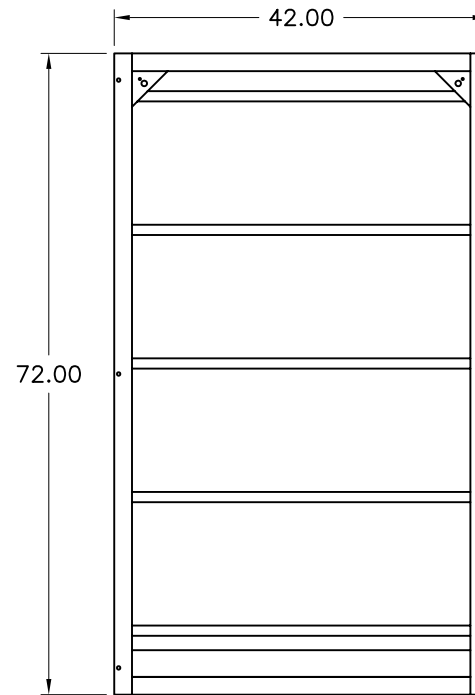

SIDE VIEW

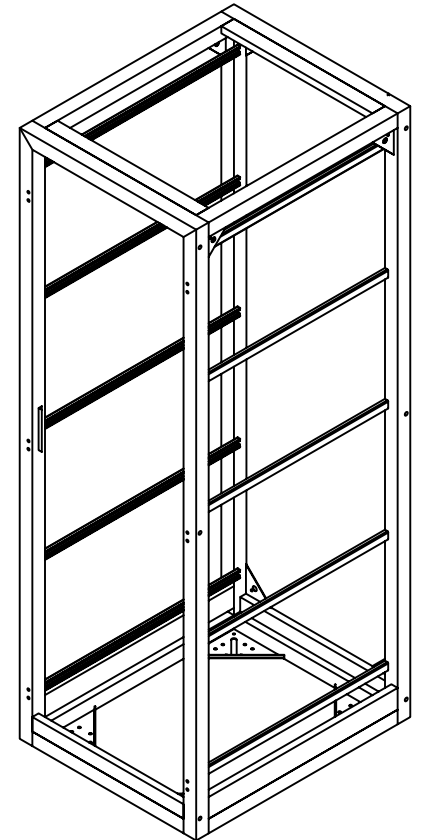

 <p>ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.</p> <p>TOLERANCE .00X±.010 .01X±.030 .1X±.080 (DEC)±.5 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED</p>	<p>FILE: FRAME, SEISMIC 72" x 24" x 42" NEBS RATED</p>	PART NO. FS72BQ-3	CHECKED BY: CR	SCALE: N/A	<p>MATERIAL: N/A. FINISH: RAW(NON-FINISHED). MAX BEND R=.030, RELIEF=.060 A/R. UNLESS OTHERWISE SPECIFIED</p>
		<p>DRAWN BY: AP</p>	<p>DATE: 07.24.2006</p>	<p>SHEET: 1 OF 1</p>	