

# SEISMIC SERIES FRAME FS72ED-3 W/CAGE-NUT RAILS

## DIMENSIONS


### FRAME SEISMIC

2x2 TUBING (16GA)  
GUSSETS FOR FLOOR AND REAR BRACING  
(19" RACKABLE PER E.I.A STD)  
FOUR POINT ADJUSTABLE LEVELING  
HEIGHT 72.00"  
WIDTH 24.00"  
DEPTH 36.00"


## RAIL TYPE

### L-TYPE RAILS


CAGE-NUT, M6 SCREWS  
FULLY ADJUSTABLE FRONT TO REAR  
38U

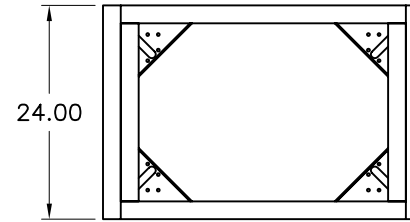


TOP VIEW

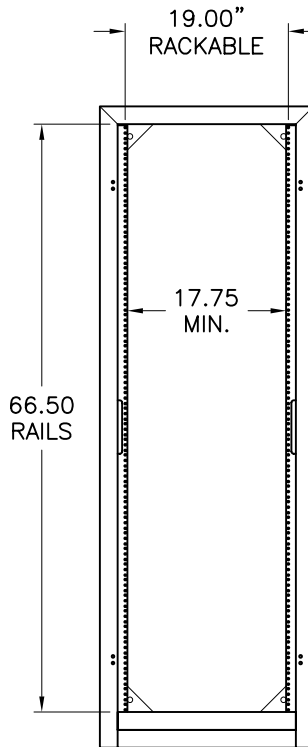

FRONT VIEW

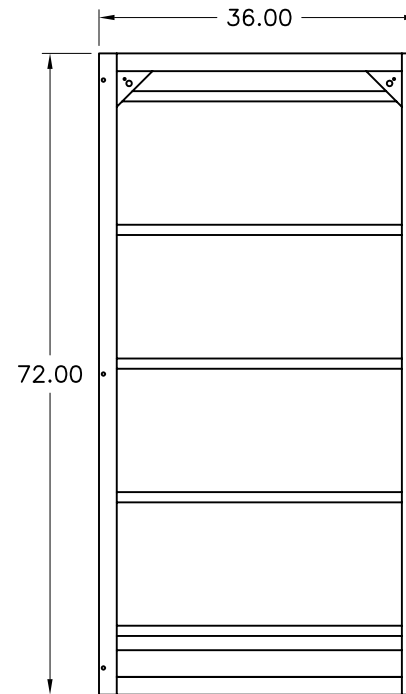

SIDE VIEW

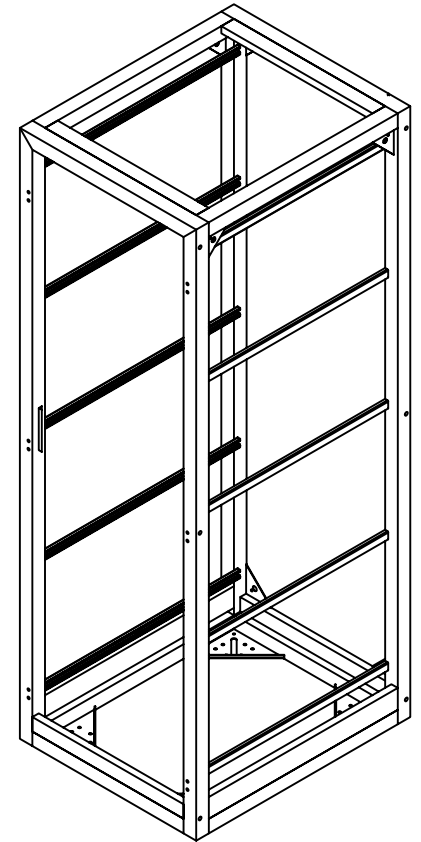

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.  
TOLERANCE .00X±.010 .01X±.030 .1X±.080 (DEC)±.5  
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: FRAME, SEISMIC  
72" x 24" x 36"  
NEBS RATED

PART NO.  
FS72ED-3  
DRAWN BY: AP  
DATE: 07.24.2006

CHECKED BY: CR  
SHEET: 1 OF 1

SCALE: N/A  
REV: --

MATERIAL: N/A.  
FINISH: RAW(NON-FINISHED).  
MAX BEND R=.030, RELIEF=.060 A/R.  
UNLESS OTHERWISE SPECIFIED