

SEISMIC SERIES FRAME FS72EQ-3 W/CAGE-NUT RAILS

DIMENSIONS


FRAME SEISMIC

2x2 TUBING (16GA)
GUSSETS FOR FLOOR AND REAR BRACING
(19" RACKABLE PER E.I.A STD)
FOUR POINT ADJUSTABLE LEVELING
HEIGHT 72.00"
WIDTH 24.00"
DEPTH 42.00"


RAIL TYPE

L-TYPE RAILS


CAGE-NUT, M6 SCREWS
FULLY ADJUSTABLE FRONT TO REAR
38U

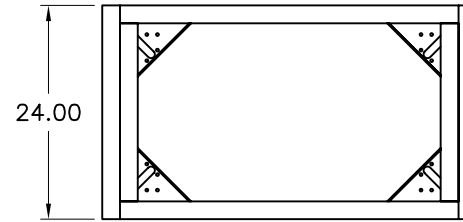


TOP VIEW

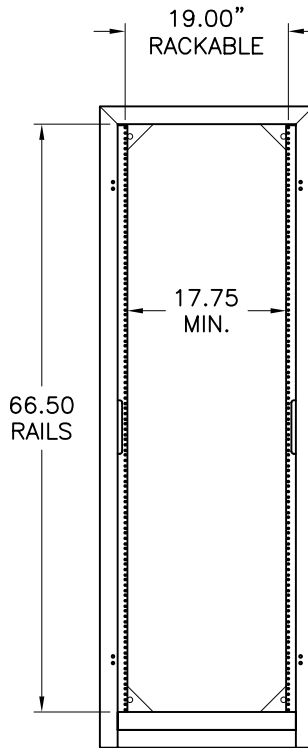

FRONT VIEW

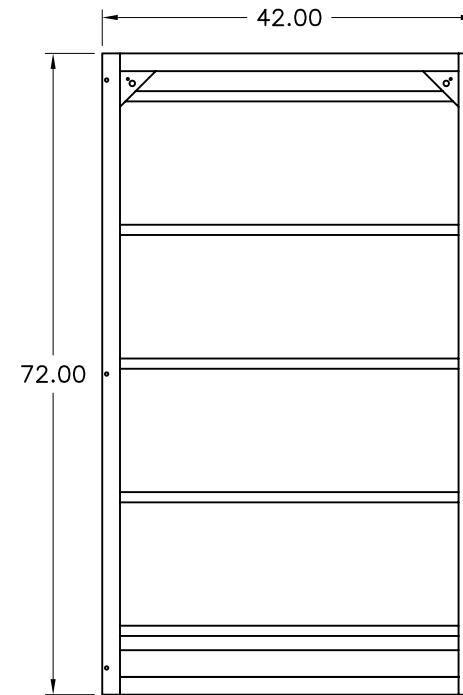

SIDE VIEW

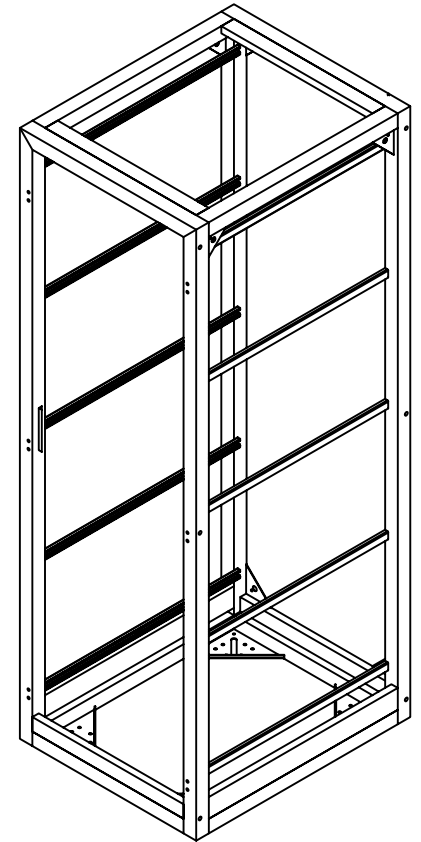

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.
TOLERANCE .00X±.010 .00X±.030 .X±.080 (DEC)±.5
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: FRAME, SEISMIC
72" x 24" x 42"
NEBS RATED

PART NO.
FS72EQ-3
DRAWN BY: AP
DATE: 07.24.2006

CHECKED BY: CR
SHEET: 1 OF 1

SCALE: N/A
MATERIAL: N/A.
FINISH: RAW(NON-FINISHED).
MAX BEND R=.030, RELIEF=.060 A/R.
UNLESS OTHERWISE SPECIFIED