

# SEISMIC SERIES FRAME FS84BB-3 W/10-32 TAPPED RAILS

## DIMENSIONS


### FRAME SEISMIC

2x2 TUBING (16GA)  
GUSSETS FOR FLOOR AND REAR BRACING  
(19" RACKABLE PER E.I.A STD)  
FOUR POINT ADJUSTABLE LEVELING  
HEIGHT 84.00"  
WIDTH 24.00"  
DEPTH 30.00"


## RAIL TYPE

### L-TYPE RAILS


10-32 TAPPED  
FULLY ADJUSTABLE FRONT TO REAR  
45U

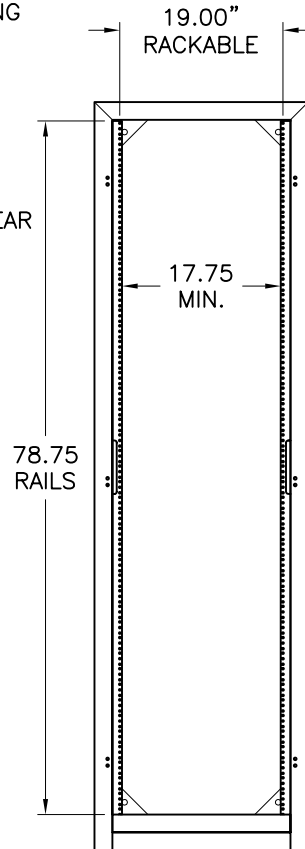


FRONT VIEW

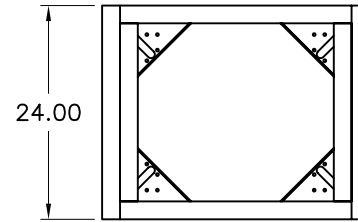

TOP VIEW

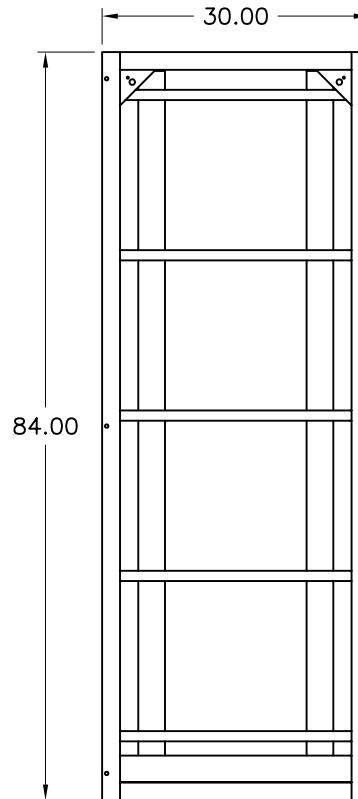

SIDE VIEW

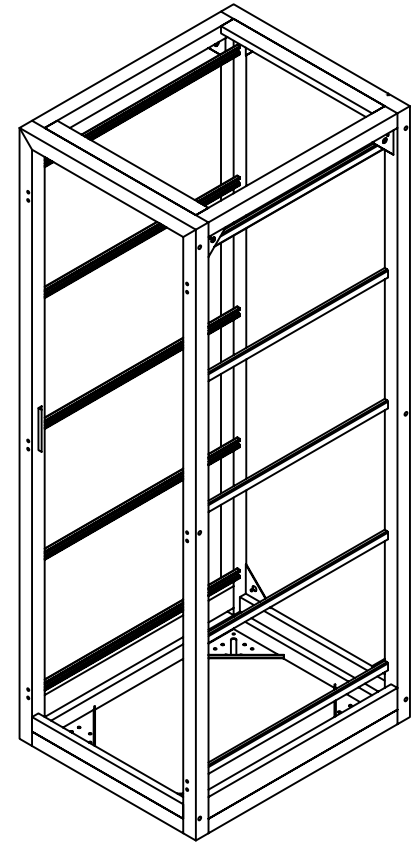

**DAMAC**  
PRODUCTS INC.  
LA MIRADA, CA. 90638

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.  
TOLERANCE .00X±.010 .00X±.030 .X±.080 (DEG)±.5  
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

TITLE: FRAME, SEISMIC  
84" x 24" x 30"  
NEBS RATED

PART NO. FS84BB-3  
DRAWN BY: CR DATE: 06.12.2002

CHECKED BY: RG  
SCALE: N/A  
SHEET: 1 OF 1

MATERIAL: N/A  
FINISH: BLACK POWDER-COATED  
MAX BEND R=.030, RELIEF=.060 A/R  
UNLESS OTHERWISE SPECIFIED