

SEISMIC SERIES FRAME FS84BQ-3 W/10-32 TAPPED RAILS

DIMENSIONS


FRAME SEISMIC

2x2 TUBING (16GA)
GUSSETS FOR FLOOR AND REAR BRACING
(19" RACKABLE PER E.I.A STD)
FOUR POINT ADJUSTABLE LEVELING
HEIGHT 84.00"
WIDTH 24.00"
DEPTH 42.00"


RAIL TYPE

L-TYPE RAILS


10-32 TAPPED HOLES
FULLY ADJUSTABLE FRONT TO REAR
45U

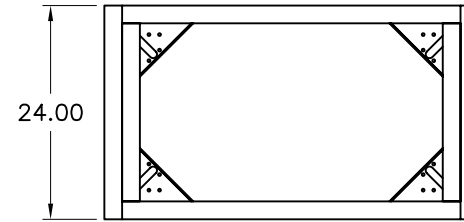


TOP VIEW

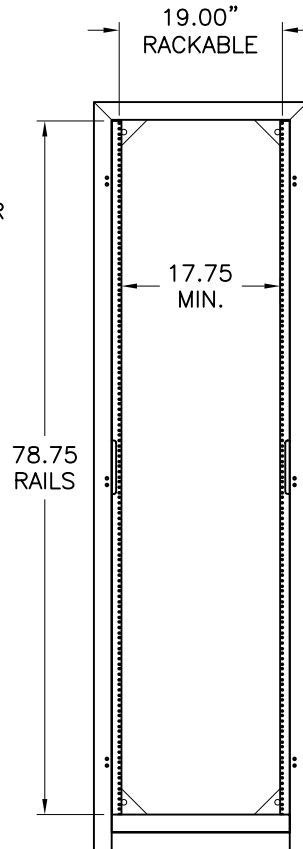

FRONT VIEW

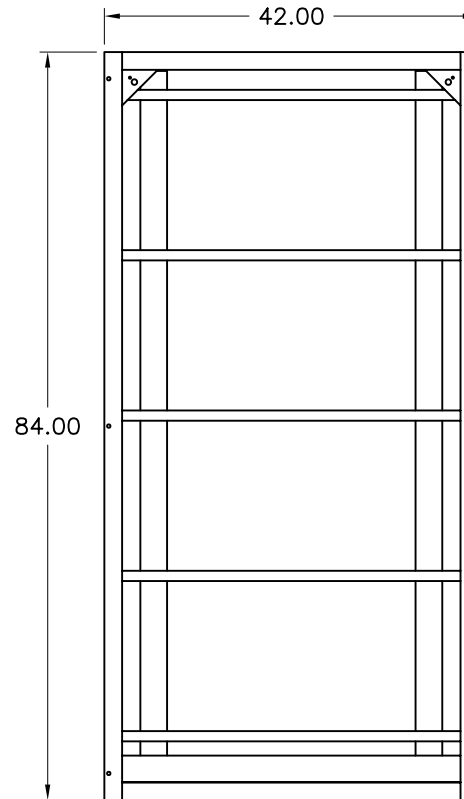

SIDE VIEW

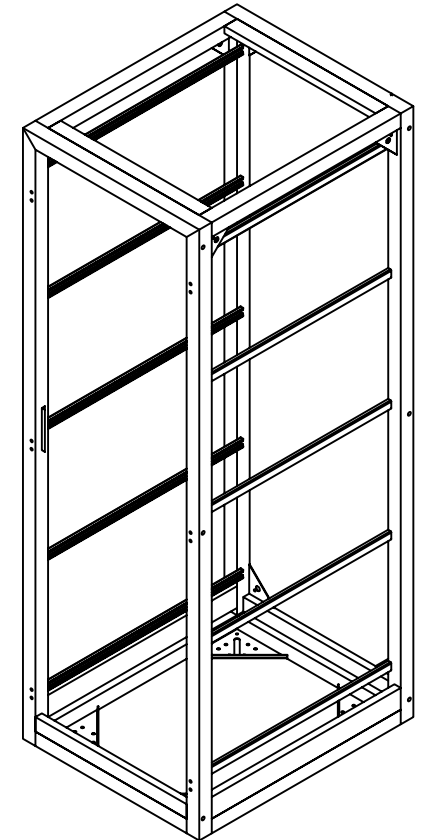

DAMAC ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.
PRODUCTS INC. TOLERANCE .000±.010 .001±.030 .002±.080 (DEC)±.5
LA MIRADA, CA. 90638 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

TITLE: FRAME, SEISMIC
84" x 24" x 42"
NEBS RATED

PART NO.
FS84BQ-3
DRAWN BY: AP DATE: 07.20.2006

CHECKED BY: CR
SCALE: N/A
SHEET: 1 OF 1
REV: --

MATERIAL: N/A
FINISH: BLACK POWDER-COATED
MAX BEND R=.030, RELIEF=.060 A/R.
UNLESS OTHERWISE SPECIFIED