
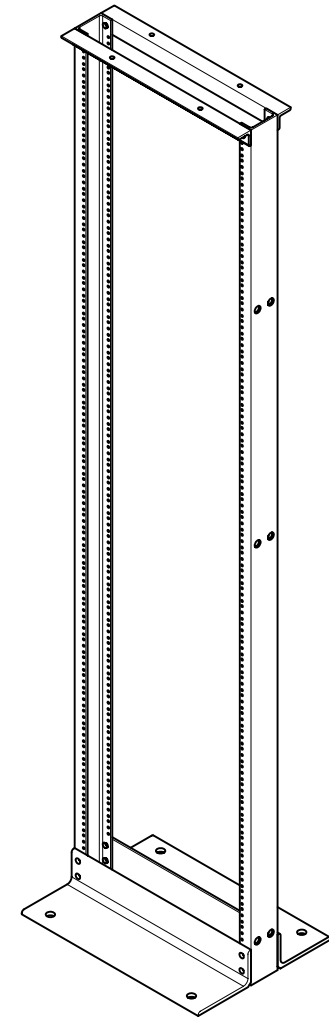
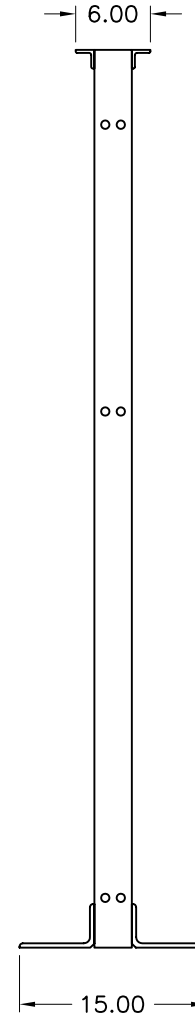
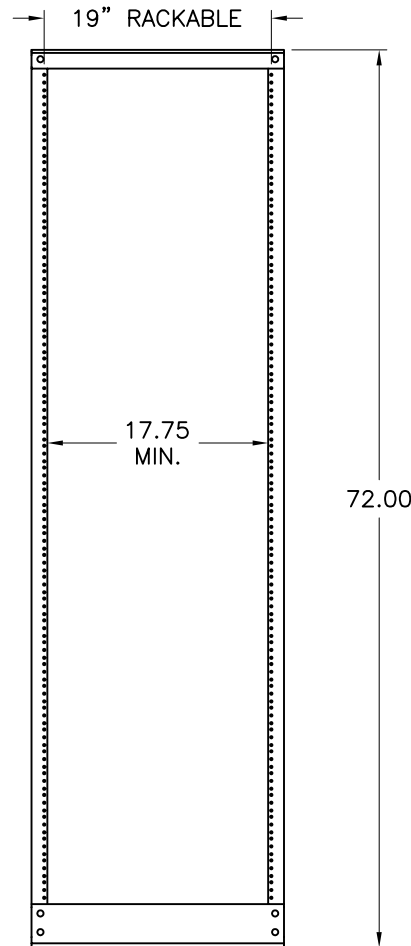


RELAY RACK SERIES RRA19072

SPECIFICATIONS

- * UL LISTED
- * STANDARD EIA HOLE PATTERN: $\frac{5}{8}$ " $\frac{5}{8}$ " $\frac{1}{2}$ "
- * #12-24 TAPPED HOLES
- * LOAD CAPACITY: 700LBS.
- * MATERIAL: 6061-T6 ALUMINUM
- * FINISH: CLEAR

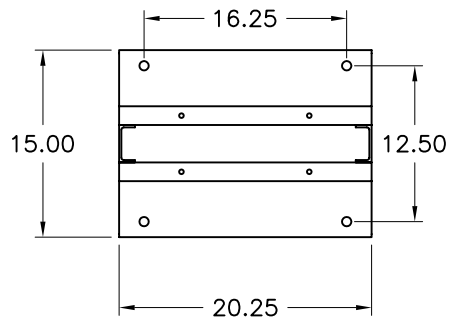

ISOMETRIC VIEW

| | | | | | | |
|-----------|---|--|----------|-------------|--------|---|
| | ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC. TOLERANCE .000±.010 .001±.030 .031±.080 (DED)±.5 ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED | HEAVY DUTY RACK 72.0 x 20.25 x 15.00 STD. RELAY RACK | PART NO. | CHECKED BY: | SCALE: | MATERIAL: |
| | | | RRA19072 | CR | N/A | ALUM 6061-T6 |
| DRAWN BY: | DATE: | | SHEET: | REV: | | FINISH: CLEAR |
| AP | 06.08.2006 | | 1 OF 1 | -- | | MAX BEND R=.030, RELIEF=.060 A/R. UNLESS OTHERWISE SPECIFIED |