



# RELAY RACK SERIES RRA19084-3MU

## SPECIFICATIONS


- \* UL LISTED
- \* STANDARD EIA HOLE PATTERN:  $5\frac{5}{8}$ "  $5\frac{1}{8}$ "  $1\frac{1}{2}$ "
- \* #12-24 TAPPED HOLES
- \* LOAD CAPACITY: 700LBS.
- \* MATERIAL: 6061-T6 ALUMINUM
- \* FINISH: BLACK

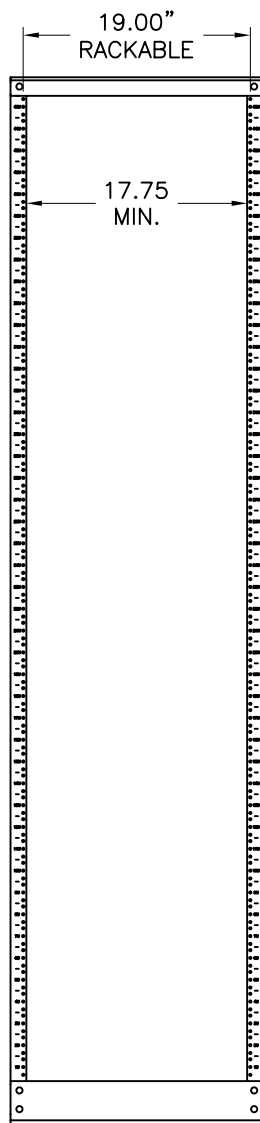


FRONT VIEW

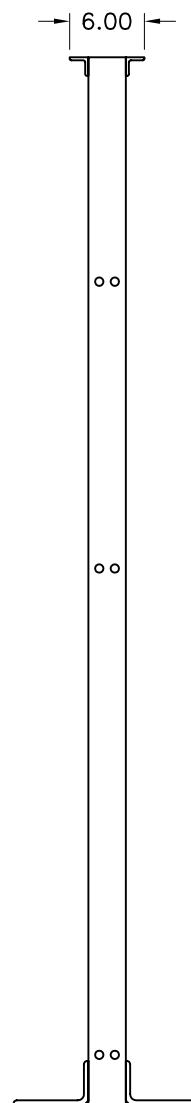

FRONT VIEW

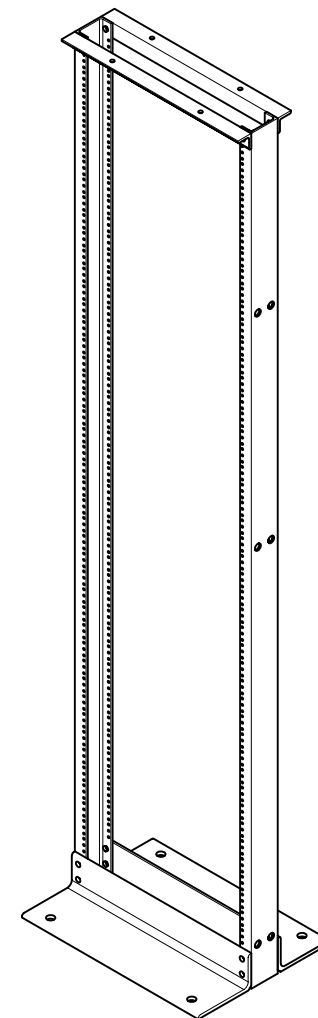

ISOMETRIC VIEW

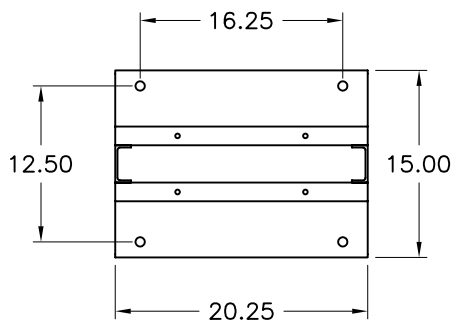

TOP VIEW



ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.  
TOLERANCE .000 $\pm$ .010 .001 $\pm$ .030 .031 $\pm$ .080 (DEC) $\pm$ .5  
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

FILE: STANDARD RACK RACK  
84.0 x 20.25 x 15.00  
W/RMU MARKING UPWARD

PART NO.  
RRA19084-3MU  
DRAWN BY: CR  
DATE: 12.04.2001

CHECKED BY: RG  
SCALE: N/A  
SHEET: 1 OF 1  
REV: --

MATERIAL: ALUM 6063-T6  
FINISH: RAW(NON-FINISHED).  
MAX BEND R=.030, RELIEF=.060 A/R.  
UNLESS OTHERWISE SPECIFIED