RAPID-NET SERIES : 84.50 x 24.00 x 40.00
PART NO: CRN384EPB1BSV3

REVISIONS			
REV	ECO	DATE	DESCRIPTION
--	--	--	— — — — — — —

MOUNTING RAILS: 15U (45U TOTAL)

M6 CAGE-NUT RAILS, 15U/COMPARTMENT
(2) PAIR, 19" EIA-310-D COMPLIANT
(1) PAIR RAPID NET RAILS PER COMPARTMENT
30PC M6 HARWARE INCLD.
RAILS SET AT 29.00" DEEP



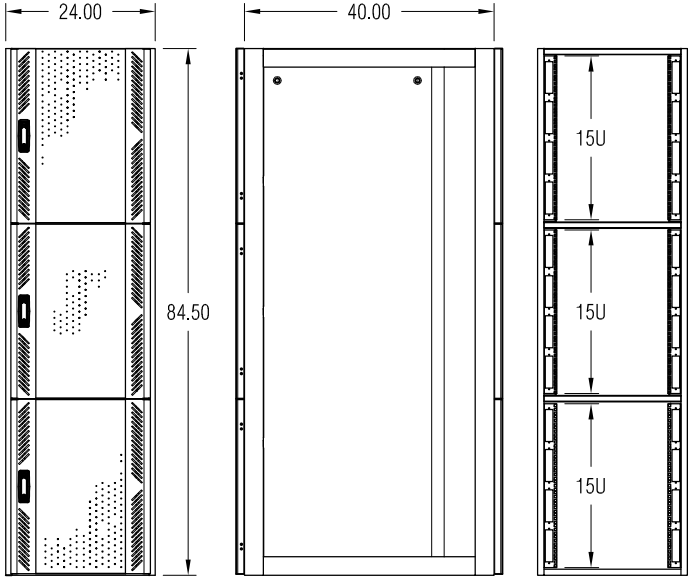

FRONT VIEW

SIDE VIEW

REAR VIEW
(W/OUT DOORS)

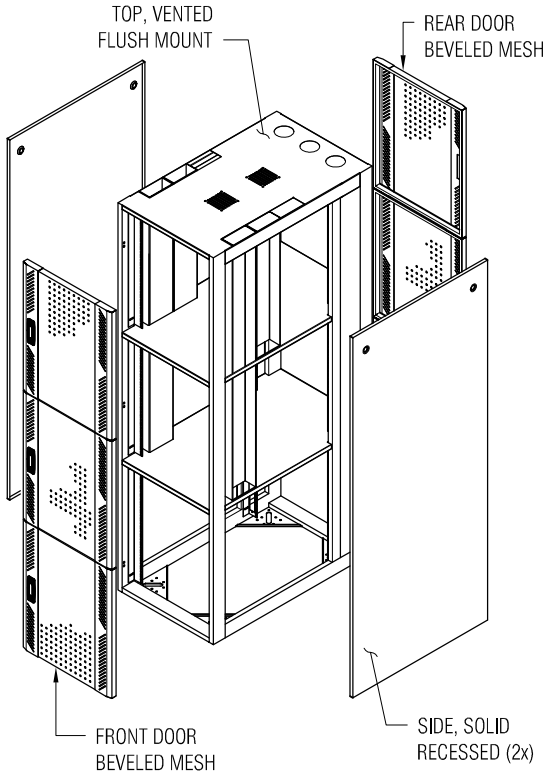

TOP VIEW

VENTED, 2-FAN READY
W/CABLE CHANNELS
(3x) CABLE KNOCK-OUTS



MOUNTING RAILS

(REAR RAILS ONLY)

PATENT PENDING



8 RAPID-NET CASSETTES PER COMPARTMENT
(4 PER RAIL)
**NOTE: BRACKETS ARE SOLD SEPARATE
(ARN4PHP-3F: 4-PORT; ARN6PHP-3F: 6-PORT)

BOTTOM VIEW

FLOOR MOUNT DIMS: 17.25 x 29.25
(4) FLOOR LEVELERS INCLD.



SEISMIC FLOOR MOUNTING PLATES
OPTIONAL CASTER KIT AVAILABLE

DIMENSIONS

RAPID-NET FRAME
3 x 1 TUBULAR STEEL

HEIGHT:	84.50
WIDTH:	24.00
DEPTH:	40.00

WT CAPACITY

3000 LBS STATIC

MOUNTING RAIL

15U , L-RACK ANGLES ANGLES
CAGE-NUT, M6
EIA SPACING, $\frac{5}{8} \times \frac{5}{8} \times \frac{1}{2}$
19" RACKABLE
RAILS SET AT 29.00 DEPTH

SIDE PANEL

SOLID, RECESSED, LOCKING
ZERO CLEARANCE COUPLING
DIMS: 78.45H x 26.88W x 1.00D

DOORS F/B

HI-FLO MESH, 88% AIR-FLOW
REINFORCED BEVELED DESIGN
PREMIUM LOCK, KEYED ALIKE
REMOVABLE, 180 DEGREE SWING
DIMS: 28.00H x 22.38D x 1.31W

TOP PANEL

VENTED, WELD-ON
2-FAN READY
CABLE CHANNELS

ACCESSORIES

SOLD SEPARATE

COLOR

BLACK TEXTURE

CLASSIFICATION

ZONE 4
19" EIA-310-D COMPLIANT
ROHS COMPLIANT

DAMAC PRODUCTS INC.
LA MIRADA, CA 90638

ALL INFORMATION ARE PROPRIETARY DATA OF DAMAC PRODUCTS INC. ANY REPRODUCTION/USE IN ANY FORM MUST HAVE PRIOR WRITING AGREEMENT W/ DAMAC.

TOLERANCE .XXX±.010 .XX±.030 .X±.060 °(DEG)±.5
ALL DIM. ARE IN INCHES UNLESS OTHERWISE SPECIFIED

TITLE: CABINET, RAPID-NET SERIES 84.50 x 24.00 x 40.00 W/CAGE-NUT RAILS

PART NO.	CHECKED BY:	SCALE:
CRN384EPB1BSV3	CR	N/A
DRAWN BY: AP	DATE: 11.10.2008	SHEET: 1 OF 1
		REV: --

MATERIAL: N/A
FINISH: EPOXY POWDER-COAT
MAX BEND R=.030, RELIEF=.060 A/R.
UNLESS OTHERWISE SPECIFIED